

3-in-1 AI Communication Bar

www.lamasatech.com


in f X



Transform Your Customer Interactions

High resolution camera

Delivers sharp, lifelike image quality in any lighting environment with a 5-megapixel wide dynamic range camera for reliable facial recognition, customer analytics, and interactive experiences.

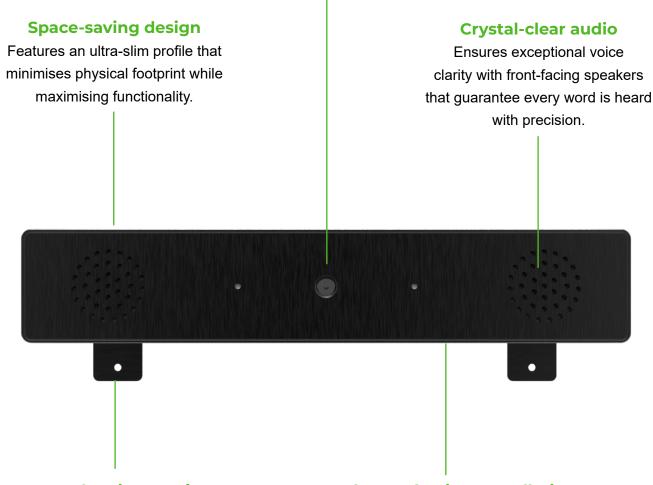

Seamless integration

Mounts effortlessly to our Muro
Canvas or Versi Indoor Displays with
a streamlined design that ensures
quick installation and a clean,
professional appearance.

Advanced noise cancellation

Deliver flawless customer interactions in any environment. Our communication bar features intelligent noise cancellation that filters out background distractions.

All-in-One Solution for Modern Digital Experiences

The 3-in-1 AI Communication Bar is the ultimate all-in-one solution designed specifically for modern AI customer service kiosks. Combining a high-resolution camera, crystal-clear front-facing speakers, and an integrated microphone into a single sleek device, it eliminates the need for multiple components and complicated installations.

Its ultra-slim form factor seamlessly mounts to the display or kiosk, delivering professional-grade video, audio, and voice capture capabilities. Whether you're deploying interactive customer service kiosks, wayfinding stations, or customer support solutions, this communication bar provides everything you need for engaging, high-quality user experiences in a single, streamlined package.



Al-Ready kiosks enhance customer interactions with efficient service for tech-savvy users, freeing staff for other tasks while delivering real-time excellence across industries.



Manufactured to the highest standards with commercial-grade components, the 3-in-1 Al Communication Bar is designed to run seamlessly with your kiosk and display.



LamasaTech accessories provide a standard 1-year warranty included for your peace of mind.

Specifications

Model	3-in-1 AI Communication Bar	
Camera	Resolution	2560 x 1944
	Frame rate	30 frames per second
	Imaging Controls	Gain/White Balance Auto
	os	Windows 7 onwards, android, linux
	Focal length	4mm lens (90-degree distortion-free lens)
	Image sensor	5MP image sensor
	Imaging features	Digital wide dynamic range face camera
Microphone	Audio processing	Acoustic calibration includes AEC (Acoustic Echo Cancellation), ANC (Anoise Cancellation), AGC (Automatic Gain Control), and DNN.
	Microphone array	Supports a 4-microphone linear microphone array, utilising far-field recognition and noise reduction technology to achieve a pickup distance of up to 10m.
	Sampling rate	48000
	MIC sensitivity	-28dB
	Operating temperature	-20°C ~ 60°C
Speaker	Speakers	2 x 5W, 8 Ohms
	Power consumption	≤70W
	Operating temperature	-20°C ~ 60°C

Other	Available ports	USB x 1
	Dimensions	See technical drawings


Product codes


LT-ACC_+ADDComBAR


3-in-1 AI Microphone, speaker and camera communication bar


3-in-1 Communication Bar - Technical drawings


All measurements specified are in millimetres.











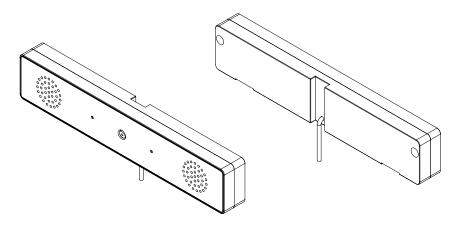







3-in-1 Communication Bar Mounted on the 21" Muro Canvas - Technical drawings

All measurements specified are in millimetres.




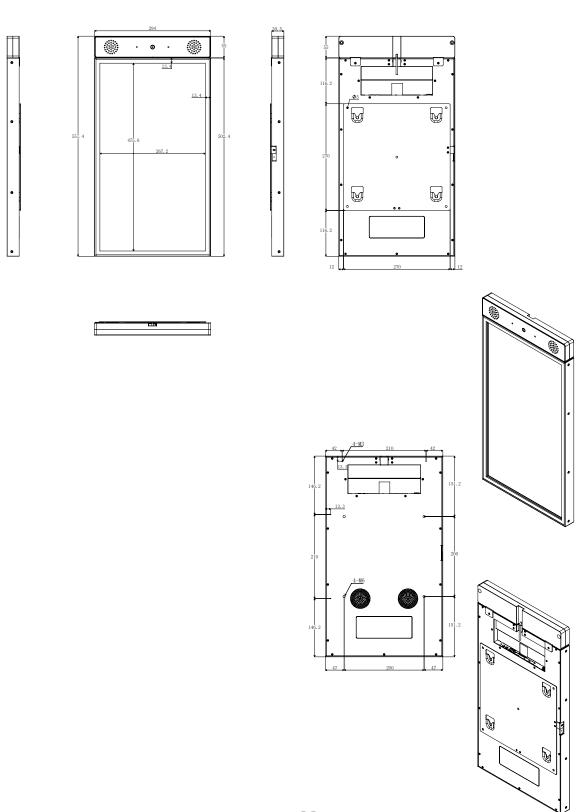

3-in-1 Communication Bar Mounted on the 27" Muro Canvas - Technical drawings

All measurements specified are in millimetres.



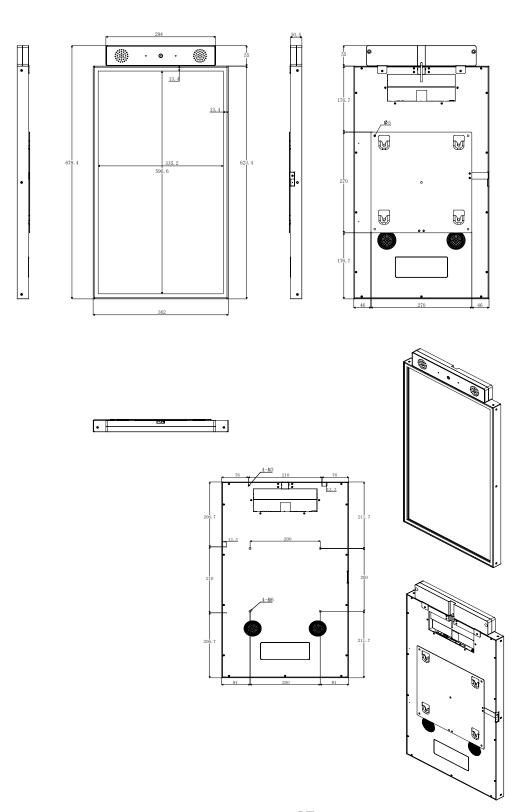



Contact us

UK: +44 (0) 191 622 0725

US: +1 (805) 308-9623

hello@lamasatech.com

lamasatech.com